



ONDUFIL™ STANDARD XC 75 AND STAINLESS STEEL SPRING WASHERS

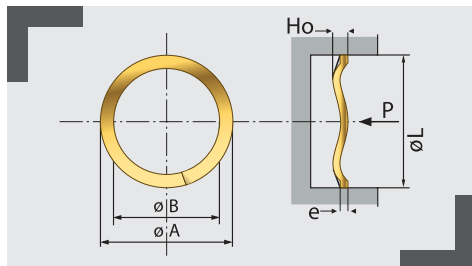

For pre-stressed ball bearings

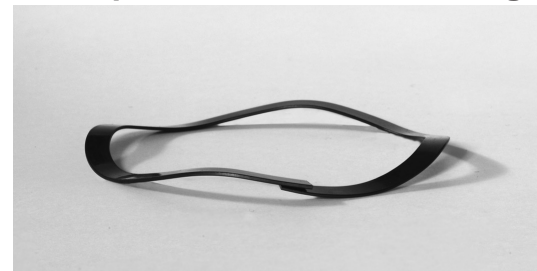

Borrelly references*	Standard references for the bearing		Bore dia. (mm)	Approx. dia. (mm)	Approx. dia. (mm)	Wire cross-section (mm)	Number of waves	Free ht approx. Ho (mm)	Height fitting H1 (mm)	Load P1 (daN) +/- 10%	Stiffness mean (daN/mm)	May be set to maximum compressed height (mm)
				OD A**	ID B***							
RD0223J124030XT	EL8-608	R7-627	22	22.0	17.2	2.4 x 0.30	3	2.8	1.45	5.8	4.3	0.7
RD0243J124030XT	EL9-609		24	24.0	19.2	2.4 x 0.30	3	3.4	1.50	7.0	3.7	0.7
RD0263J126045XT	R9-629 6000		26	26.0	20.8	2.6 x 0.45	3	3.0	2.00	7.0	7.0	1.0
RD0283J126045XT	6001		28	28.0	22.8	2.6 x 0.45	3	3.4	2.00	7.8	5.5	1.0
RD0303J126045XT	6200		30	30.0	24.8	2.6 x 0.45	3	3.7	2.00	8.6	5.0	1.0
RD0323J126045XT	6201 6002		32	32.0	26.8	2.6 x 0.45	3	3.8	2.00	9.2	5.1	1.0
RD0353J126045XT	6202 6300 6003		35	35.0	29.8	2.6 x 0.45	3	4.7	2.00	10.0	3.7	1.0
RD0373J126045XT	6301		37	37.0	31.8	2.6 x 0.45	3	5.2	2.00	10.2	3.2	1.0
RD0403J140060XT	6203		40	40.0	32.0	4.0 x 0.60	3	3.1	2.00	10.4	9.4	1.3
RD0423J140060XT	6302 6004		42	42.0	34.0	4.0 x 0.60	3	3.4	2.00	11.5	8.2	1.3
RD0473J140060XT	6204 6303 6004		47	47.0	39.0	4.0 x 0.60	3	4.1	2.00	12.6	6.0	1.3
RD0524J140060XT	6205 6304		52	52.0	44.0	4.0 x 0.60	4	3.4	2.35	13.0	12.4	1.3
RD0554J140060XT	6006		55	55.0	47.0	4.0 x 0.60	4	3.5	2.35	13.0	11.3	1.3
RD0624J140060XT	6206 6305 6007		62	62.0	54.0	4.0 x 0.60	4	4.1	2.35	16.0	9.1	1.3
RD0684J155070XT	6008		68	68.0	57.0	5.5 x 0.70	4	4.3	2.80	18.8	12.5	1.5
RD0704J155070XT			70	70.0	59.0	5.5 x 0.70	4	4.3	2.80	17.3	11.5	1.5
RD0724J155070XT	6207 6306 6404		72	72.0	61.0	5.5 x 0.70	4	4.6	2.80	20.9	11.6	1.5
RD0754J155070XT	6009		75	75.0	64.0	5.5 x 0.70	4	5.0	2.80	20.3	9.2	1.5
RD0804J155070XT	6208 6307 6010 6405		80	80.0	69.0	5.5 x 0.70	4	5.7	2.80	22.0	7.6	1.5
RD0854J160080XT	6209		85	85.0	73.0	6.0 x 0.80	4	5.3	2.80	26.6	10.6	1.7
RD0904J160080XT	6210 6308 6011 6406		90	90.0	78.0	6.0 x 0.80	4	6.0	2.80	24.9	7.8	1.7
RD0954J160080XT	6012		95	95.0	83.0	6.0 x 0.80	4	6.8	2.80	26.3	6.5	1.7
RD1005J160080XT	6211 6309 6013 6407		100	100.0	88.0	6.0 x 0.80	5	4.5	2.80	28.5	16.7	1.7
RD1055J160080XT	61915		105	105.0	93.0	6.0 x 0.80	5	4.8	2.80	29.1	14.6	1.7
RD1105J160080XT	6211 6310 6014 6408		110	110.0	98.0	6.0 x 0.80	5	5.2	2.80	30.5	12.7	1.7
RD1155J160080XT	6015		115	115.0	103.0	6.0 x 0.80	5	6.1	3.20	32.4	11.2	1.7
RD1205J160080XT	6213 6311 6409		120	120.0	108.0	6.0 x 0.80	5	6.6	3.20	33.4	9.8	1.7

* For a stainless steel washer, replace the characters "XT" by "IX" at the end of a reference. ** Adjusted in bore L *** Clearance for a shaft of dia. B - 0.5 mm
ONDUFIL™ is a registered trademark of Borrelly.